




**POSBANK**<sup>®</sup>

The one that creates a new trend

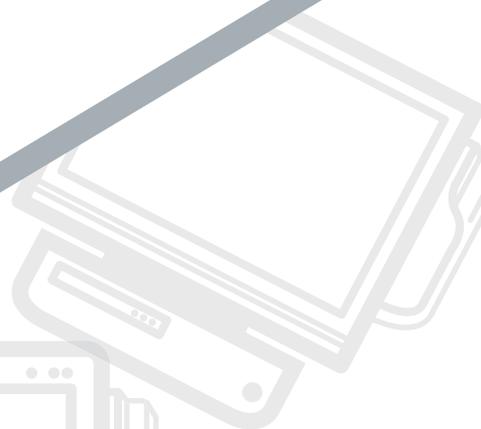

● ● ● Contents

**Product inventory**

**POS terminals**

- 02 AnyShop eco
- 04 mini0 II
- 06 AnyShop
- 08 IMPREX
- 10 SlimPOS
- 12 BoxPOS
- 13 POSmo

**Receipt printers**

- 14 A7
- 15 A9+
- 16 A10+

**17 Peripherals** PLU keyboard / Scanner / Cash drawer

**18 'POPs' Restaurant solution**

**20 'Utong' Retail solution**

<b>POS terminals</b>	 AnyShop eco	 mini0 II	 AnyShop	 IMPRES
 SlimPOS	 BoxPOS	<b>POS Monitors</b>	 POSmo	<b>Software</b>
<b>Product inventory</b>			 Restaurant solution	 Retail solution
			<b>Receipt printers</b>	 A7
 PLU keyboard	 Scanner	 Scanner	 Scanner	 Cash drawer

The one that creates a new trend

NEW

# AnyShop eco

경제적인 가격, 강화된 성능의 Trend Item,  
AnyShop eco



### Upgrade of performance

- 강화된 성능의 New Intel ATOM processor 탑재 (D525)
- Clock Speed 1.80 GHz로 상승
- 최신 DDR3 메모리 적용으로 성능 향상

### AnyShop, Any Space

- 외식업, 유통업, 전문점 등 다양한 매장과 잘 어울리는 디자인
- 설치장소에 구애받지 않는 슬림한 디자인

### Easy maintenance

- 손쉬운 유지보수
- 옵션기기 탈부착 용이

전력소비가 적으며, POS SYSTEM에 최적화

성능은 UP, 가격은 Down된 경쟁력 있는 제품



**Slim & Round Design**  
본체와 모니터 일체형



**각도 조절이 자유로운 터치 스크린**



**고객용 디스플레이**  
VFD 타입  
2줄 20자



**2nd LCD 디스플레이**  
12.1" 듀얼모니터  
해상도 : 1024 x 768



**다기능 일체형 장치**  
마그네틱 카드 리더  
스마트 카드 리더



## System



AnyShop eco	
CPU	Intel Atom processor D525 (1M Cache, 1.80 GHz)
Chipset	Intel ICH8M
HDD	SATA 2.5inch (Default 320GB)
Memory	DDR3-800 SODIMM x 1 slot (Default 1GB up to 4GB)
VGA	Intel Gen3.5+GFX Render Core 200MHz (Pineview-M)
Display	15" TFT LCD with 5-wired resistive Touch Screen 1024 x 768 resolution
Internal I/O	
USB	3 Ports (reserved for Touch controller, SCR EMV card, Camera, MSR controller)
RS-232	COM 4 reserved for CDP COM 5 & 6 with 9pin header
VGA	Reserved for 2nd display
Extension	Mini PCIe
LVDS	24bit LVDS
Parallel	1 Port
External I/O	
USB	Rear 2
PS/2	Mouse 1 / Keyboard 1
RS-232	COM 1 ~ 3 with +5/12V power output on 9pin
LAN	Realtek RTL 8111E Gigabit LAN
Audio	Realtek ALC888 Line-out / Line-in / Mic
Options	
MSR	Comply with ISO 7811, Support 1& 2 & 3 track
SCR	EMV level 1
Dallas	Dallas I-button reader
Customer display	VFD type (20 x 2)
2nd LCD	12.1" LCD : 1024 x 768 resolution
DVR	DVR Card : 4 channels support
WiFi	Mini PCI for wireless LAN
Qualification	CE, FCC, KCC
Power Supply	12V / 5A Adaptor
OS Support	Linux, Windows 2000/XP/XPE, WEPOS, POS Ready, Windows 7
Dimension(WxHxD)	419 x 406 x 262(mm)

\* 사양은 사전 통보없이 변경될 수 있습니다.

The one that creates a new trend



# mini O II

10.1" 모니터의 경제적인 가격,  
감각적인 소형디자인 All In One Total POS System



### Minimal Style

- 사용자 편의성을 고려하여 설계한 인터페이스
- 2" Jam-free 영수증프린터 내장
- 10.1" 터치모니터, 키보드, MSR 통합 탑재

### Small Design

- 감각적인 소형디자인
- 공간절약형 설계구조로 기능성 극대화

### Data Stability

- SSD(Solid State Disk) Option
- CF카드 탑재 가능
- 데이터 안정성 및 용이성 제공
- 저전력의 Intel Atom 프로세스 적용



**내장 프린터**  
2" 영수증 프린터  
200mm/sec max



**고객용 디스플레이**  
Rear or Pole 타입  
2줄 16자



**다기능 일체형 장치**  
마그네틱 카드 리더기  
스마트 카드 리더기



**내장 키보드**  
미니키보드  
PLU Key (option)



**CF card socket**

## System



miniO II	
CPU	Intel Atom N270 1.6GHz processor
Chipset	Intel 945GSE+ICH7M
HDD	SATA 2.5inch (Default 320GB)
Memory	DDR2 SODIMM x 1 slot (Default 1GB up to 2GB)
VGA	Intel 945GSE GMA950 Engine
Printer	2" thermal jam-free printer (24V) 200mm/sec max
Display	10.1" (1024 x 768)
<b>Internal I/O</b>	
Parallel	1 Port (reserved for internal printer)
USB	1 x touch screen, 1 x keyboard, 1 x (MSR, I-Button, SCR)
RS-232	COM 4 reserved for CDP COM 3 reserved for 2" mini printer
LVDS	Main display use
Mini PCIe	1 slot support
<b>External I/O</b>	
USB	Side 1, Rear 2
RS-232	COM 1 ~ 2 with + 5 / 12V power output on 9pin
LAN	GbE LAN
Cash drawer	1 x RJ11 , Cash drawer port
<b>Options</b>	
MSR	Comply with ISO 7811, Support 1 & 2 & 3 track
SCR	IC card reader
Dallas	Dallas I-button reader
Keyboard	Mini standard keyboard or Programmable keyboard : 55 Key
Customer display	Rear or Pole (LCD 16 x 2)
CF CARD	CF card reader
<b>Qualification</b>	
CE, FCC, KCC	
<b>Power Supply</b>	
INPUT : 100-240V~, 50/60Hz 1.5A OUTPUT : DC24V 2.5A	
<b>OS Support</b>	
Windows XP/XPE, POS Ready (WEPOS) on HDD, Linux	
<b>Dimension(WxHxD)</b>	
395 x 176 x 328(mm)	

\* 사양은 사전 통보없이 변경될 수 있습니다.



The one that creates a new trend



# AnyShop

어느 매장과도 잘 어울리는 디자인,  
설계구조를 가진 Trend Item!

### 어떤 매장에서도 잘 어울리는 구조

- 외식업, 유통업
- 병원 및 엔터테인먼트 매장
- 스탠드형, 키오스크 거치대 장착으로 공공시설 터치시스템
- 벽걸이용 안내시스템

### 손쉬운 유지보수/옵션장착

- 착탈식 HDD교체 (드라이버 없이 HDD교체)
- 간편한 힌지와 본체 분리
- 스크류 고정없이 장착할 수 있는 CDP
- 쉬운 듀얼모니터 장착

### 강력한 쿨링시스템 채택

다양한 칼라 선택 화이트/와인/블랙/기타

### 다양한 스펙지원

- 저전력, 저발열 Intel Atom CPU
- 속도, 안정성에 뛰어난 Mobile CPU
- 최상의 속도를 자랑하는 Dual Core CPU



**다양한 설치 지원**  
스탠드형, 벽걸이형  
월마운트, 키오스크  
거치대



**카메라(옵션)**  
매장 보안유지  
화상통화



**고객용 디스플레이**  
VFD 타입  
2줄 20자



**2nd LCD 디스플레이**  
12.1" 듀얼모니터  
해상도 : 1024 x 768



**다기능 일체형 장치**  
마그네틱 카드 리더  
스마트 카드 리더



## System



	AnyShop M	AnyShop P	AnyShop D5
CPU	Intel Celeron Mobile 1.5GHz	Intel Core 2 Duo processor	Intel Atom D510
Chipset	Intel 91 x GME	Intel 945GME	ICH8M
HDD	SATA 2.5inch (Default 320GB)		
Memory	DDR2 SODIMM x 1 slot (Default 512MB up to 2GB)	DDR2 SODIMM x 2 slot (Default 1GB up to 4GB)	DDR2 SODIMM x 1 slot (Default 1GB up to 2GB)
VGA	Intel 82915GM GMCH (Independent dual display)	Intel 82945GM GMCH (Independent dual display)	Intel Gen3.5+GFX Render Core
Display	15" TFT LCD with 5-wired resistive Touch Screen 1024 x 768 resolution		
<b>Internal I/O</b>			
USB	3 Ports (reserved for Touch controller, SCR EMV card, Camera, MSR controller)		
PS/2	1 Keyboard with pin header		
RS-232	COM 4 reserved for CDP	COM 3 reserved for CDP	COM 6 reserved for CDP
D-SUB	COM 5 & 6 with 9pin header	COM 3 with 9pin header	COM 4 & 5 with 9pin header
D-SUB	Reserved for 2nd display		
Extension	Mini PCI		Mini PCIe
LVDS	Main display use		
<b>External I/O</b>			
Parallel	1 Port		
USB	Rear 2, Side 2		
PS/2	Mouse 1 / Keyboard 1		
RS-232	COM 1 ~ 3 with + 5/12V power output on 9pin	COM 1 ~ 2 with + 5/12V power output on 9pin	COM 1 ~ 3 with + 5/12V power output on 9pin
LAN	GbE LAN		
Audio	Line-out / Line-in / Mic		
<b>Options</b>			
MSR	Comply with ISO 7811, Support 1 & 2 & 3 track		
SCR	EMV level		
Camera	Camera		-
Dallas	Dallas I-button reader		
Customer displly	VFD type customer display (20 x 2)		
2nd LCD	12.1" LCD : 1024 x 768 resolution		
DVR	DVR Card : 4channels support		-
WiFi	Mini PCI for wireless LAN		
VGA	Mini PCI for VGA card		
<b>Qualification</b>	CE, FCC, KCC		CE, FCC, KCC, CCC
<b>Power Supply</b>	AC 110 or 220V (Max.240 watt)		INPUT : 100-240V~, 50/60Hz 1.5A OUTPUT : DC12V 5A
<b>OS Support</b>	Linux, Windows 2000/XP/XPE, WEPOS, POS Ready, Windows 7		
<b>Dimension(WxHxD)</b>	385 x 395 x 265(mm)		

\* 사양은 사전 통보없이 변경될 수 있습니다.

The one that creates a new trend



# IMPREX

세련된 디자인, 안정성을 겸비한 All In One POS System



### 안정성(내구성)

- 산업용 부품 사용으로 강한 내구성
- 열배출 팬을 뒷면으로 장착한 저소음 설계
- 강력한 Power Supply로 안정적인 전원 공급
- 저전력 & 저발열 기기 사용으로 뛰어난 열효율
- RoHS 인증

### 디자인

- 튼튼한 프레임 구조
- 다양한 매장환경에 적합한 투톤의 세련된 디자인
- 안정적인 삼각형 구조로 기구의 안정성을 최대화한 디자인
- 2008 GD(우수디자인) 선정

### 편리성

- 터치모니터와 프린터의 일체형
- 2인치 구조로 상하 높이 조절 가능
- 후면에 다양한 옵션기기 장착



**일체형 프린터**  
3" 영수증 프린터  
220mm/sec max



**각도 조절이 자유로운 터치스크린**



**고객용 디스플레이**  
VFD 타입  
2줄 20자



**2nd LCD 디스플레이**  
12.1" 듀얼모니터  
해상도 : 1024 x 768



**다기능 일체형 장치**  
마그네틱 카드 리더  
스마트 카드 리더

### System



	IMPREX M	IMPREX P
CPU	Intel Celeron Mobile 1.5GHz	Intel Core 2 Duo processor
Chipset	Intel 91xGME	Intel 945GME
HDD	SATA 2.5inch (max 2, Default 320GB)	
Memory	DDR2 SODIMM 1GB (up to 2GB)	DDR2 SODIMM x 2 slot (up to 4GB)
VGA	Intel 82915GM GMCH	Intel 82945GM GMCH
Printer	3" thermal printer (220mm/sec max, Auto cutter)	
Display	15" TFT LCD with 5-wired resistive Touch Screen 1024 x 768 resolution	
<b>Internal I/O</b>		
Parallel	1 Port (reserved for internal printer)	
USB	3 Ports (reserved for Touch controller & SCR EMV card, MSR Controller )	
PS/2	1 Keyboard reserved for pin header	
RS-232	COM 4 reserved for CDP	COM 3 reserved for built-in printer (ABR)
	COM 5 (reserved for internal printer) & COM 6 reserved for 9pin header (ABR)	
Extension	Mini PCI	
LVDS	Main display use	
<b>External I/O</b>		
USB	Rear 2, Side 3	
PS/2	Mouse 1 / Keyboard 1	
RS-232	COM 1 - 3 with + 5/12V power output on 9pin	COM 1 - 2 with + 5/12V power output on 9pin
LAN	GbE LAN	
Audio	Line-out / Line-in / Mic	
C.D	Cash drawer port	
<b>Options</b>		
MSR	Comply with ISO 7811, Support 1 & 2 & 3 track	
SCR	EMV level	
Dallas	Dallas I-button reader	
Customer display	VFD type customer display (20 x 2)	
2nd LCD	12.1" LCD : 1024 x 768 resolution	
2nd HDD	2nd HDD storage	
DVR	DVR Card : 4 channels support	
WiFi	Mini PCI for wireless LAN	
VGA	Mini PCI for VGA card	
Qualification	CE, FCC, KCC	
Power Supply	AC 110 ~ 220V (Max.240 watt) Free voltage	
OS Support	Linux, Windows 2000/XP/XPE, WEPOS, POS Ready, Windows 7	
Dimension(WxHxD)	405 x 351 x 345(mm)	



\* 사양은 사전 통보없이 변경될 수 있습니다.

The one that creates a new trend

# SlimPOS

공간절약형의 슬림하고 컴팩트한 디자인, 경제적인 가격대의 고성능 POS System



- 사용자 시각에 맞도록 상하, 좌우 각도 조절이 자유로운 터치 스크린
- 전면부와 후면부에 다양한 포트 지원
- 공간 절약형의 슬림하고 컴팩트한 디자인
- 산업용 부품 사용으로 강한 내구성
- 설치 장소에 구애 받지 않는 크기
- 합리적이고 경쟁력 있는 가격
- 간편한 옵션기기 장착
- RoHS 인증



**각도 조절이 자유로운 터치스크린**  
 상하 : 0 ~ 180°  
 좌우 : 0 ~ 90°



**2nd LCD 디스플레이**  
 12.1" 듀얼모니터  
 해상도 : 1024 x 768



**고객용 디스플레이**  
 VFD 타입  
 2줄 20자



**다기능 일체형 장치**  
 마그네틱 카드 리더  
 스마트 카드 리더



**컴팩트한 디자인**  
 설치장소에 구애 받지 않는 슬림한 크기

## System



SlimPOS D5	
CPU	Intel Atom D510
Chipset	ICH8M
HDD	SATA 2.5inch (Default 320GB)
Memory	DDR2 SODIMM x 1 slot (Default 1GB up to 2GB)
VGA	Intel Gen3.5 + GFX Render Core
Display	15" TFT LCD with 5-wired resistive Touch Screen 1024 x 768 resolution
<b>Internal I/O</b>	
USB	2 Ports (reserved for Touch controller & SCR EMV card)
PS/2	1 Keyboard reserved for pin header
RS-232	COM 4 reserved for VFD COM 5 & 6 with 9pin header
D-SUB	Reserved for 2nd display
Extension	Mini PCIe
LVDS	Main display use
<b>External I/O</b>	
Parallel	1 Port
USB	Front 2, Rear 2
PS/2	Mouse 1 / Keyboard 1
RS-232	COM 1 ~ 3 with + 5/12V power output on 9pin
LAN	GbE LAN
Audio	Line-out / Line-in / Mic
<b>Options</b>	
MSR	Comply with ISO 7811, Support 1 & 2 & 3 track
SCR	EMV level
Dallas	Dallas I-button reader
Customer display	VFD type customer display [20 x 2]
2nd LCD	12.1" LCD : 1024 x 768 resolution
DVR	-
WiFi	Mini PCI for wireless LAN
VGA	Mini PCI for VGA card
<b>Qualification</b>	CE, FCC, KCC
<b>Power Supply</b>	INPUT : 100-240V~, 50/60Hz 1.5A OUTPUT : DC12V 5A
<b>OS Support</b>	Linux, Windows 2000/XP/XPE, WEPOS, POS Ready, Windows 7
<b>Dimension(WxHxD)</b>	400 x 360 x 355(mm)

\* 사양은 사전 통보없이 변경될 수 있습니다.



The one  
that creates a  
new trend

# BoxPOS

슬림한 디자인으로 강력한 성능, 메커니즘 구조의 활용도 높은  
BoxPO LCD모니터를 장착하여 사용하는  
공간절약형 POS SYSTEM



- 사용자 편의성을 고려한 전면의 USB포트
- 탈착 가능한 HDD
- 듀얼 LCD 모니터 지원디자인

## System



	BoxPOS N2	BoxPOS P
CPU	Intel Atom N270 1.6GHz processor	Intel Core 2 Duo processor
Chipset	Intel 945GSE + ICH7M	Intel 945GME
HDD	SATA 2.5inch (Default 320GB)	
Memory	DDR2 SODIMM 1GB (up to 2GB)	DDR2 SODIMM x 2 slot (up to 4GB)
<b>Internal I/O</b>		
USB	3 Ports	
RS-232	COM 5, COM 6	COM 4 reserved for CDP, COM3 with 9pin header
D-SUB	-	Reserved for 2nd display
Extension	-	Mini PCI
LVDS	800 x 600 / 18Bit (default) / 24bit LVDS	Main display use
<b>External I/O</b>		
Parallel	1Ports	
USB	Front 2, Rear 2	
PS/2	Keyboard 1	
RS-232	COM 1, COM 2, COM 3, COM 4	COM 1 ~ 2 with + 5 / 12V power output on 9pin
Cash drawer	1 x RJ11 , Cash drawer port (option)	
LAN	Realtek RTL8111D Gigabit LAN	
VGA	1024 x 768 XGA (option)	
Qualification	CCC, CE, FCC, KCC	CE, FCC, KCC
Power Supply	INPUT : 100-240V~, 50/60Hz 1.5A OUTPUT : DC12V 5A	AC 110 or 220V (Max. 240watt)
OS Support	Windows CE 6.0 on SSD, Windows XP/XPE, POS Ready (WEPOS) on HDD, Linux	Linux, Windows 2000/XP/XPE, WEPOS, POS Ready, Windows 7
Dimension(WxHxD)	280 x 78 x 355(mm)	

\* 사양은 사전 통보없이 변경될 수 있습니다.

# POSmo

슬림한 디자인으로 공간활용이 자유로우며,  
사용자 시각에 맞도록 각도 조절이 가능한 스탠드형  
15" LCD 터치 모니터



- 얇고 심플한 디자인
- 강하고 안정된 구조의 스탠드형 모니터
- 다기능 일체형 카드리더기
- 해상도 (1024 x 768)

## System



POSmo	
Display Type	TFT LCD 15"
Touch Screen	5-wired resistive type
Display Size	15"
Colors	16 million
Resolution	1024 x 768
Contrast Ratio	600:1
Brightness	LCD panel : 250cd/m <sup>2</sup>
Response Time	8mm/sec
Viewing Angle	160°
Input Connector	RGB signal 1 Port, 12V Keyboard input port for MSR option
Output Connector	USB Touch Controller 1 Port, Keyboard output port for MSR option
Option	Comply with ISO 7811, Support 1 & 2 , 2 & 3 , 1 & 2 & 3 track
Power	12VDC / 3A

\* 사양은 사전 통보없이 변경될 수 있습니다.



The one  
that creates a  
new trend

NEW

# A7 Receipt Printer

콤팩트한 디자인, 사용자의 편리성을 제공하는  
미니프린터 A7



- 용지걸림 최소화한 Jam-free type
- 외식, 유통, 전문점 등 모든 업종에 적합
- 상단급지 방식, Auto cutter 내장으로 편리한 사용
- 손쉬운 영수증 교체방식
- 뛰어난 내구성으로 적은 유지관리비
- 콤팩트 디자인으로 공간활용 극대화

## System



A7		
Printing Method	3" Jam-free direct thermal	
Printing Speed	170 mm/sec max	
Dot Density (DPI)	203.2	
Dot Pitch (mm)	0.125*0.125	
Effective Printing Width	72mm, 576dots	
Printing Direction	Unidirectional with friction feed	
Character/Line	Font A / Font B	[12*24] 42 column s/ [10*20] 56 columns
Paper	Type / Width Thickness / Roll diameter	Thermal paper / 79.5mm (±0.5mm) 0.07mm / 83 Ømm
Reliability	TPH Life / MCBF	100km / 60,000,000 lines
Character/Set	Alphanumeric character Extended graphic	95 128 x 35 page
Barcode	EAN-8, EAN-13, CODE39, CODE93, CODE128, ITF, UPC-A, UPC-E, CODABAR	
Emulation	ESC/POS command compatible	
Driver	Windows / OPOS	
Interface	Serial / USB / Ethernet / Wi-fi	
Power	DC 24V, 2.5A	
Data Buffer	4 Kbyte	
Cutting	Life / Cutting method	700,000 cuts / Partial Cut & Full Cut
Temperature	Operation / Storage	0 ~ 40°C / -20 ~ 60°C
Qualification	CE, FCC, KCC	
Dimension(WxHxD)	136 x 162.5 x 122(mm)	



\* 사양은 사전 통보없이 변경될 수 있습니다.

# A9+ Receipt Printer

빠른 속도와 강력한 성능의 새로운  
미니프린터 A9+



- 초당 220mm의 부드럽고 빠른 인쇄속도
- 사용자 편의를 위한 외장형 멜로디 및 음성지원
- 상단급지 방식, Auto cutter 내장으로 편리한 사용
- 뛰어난 내구성으로 적은 유지관리비
- 다양한 인터페이스 지원

## System



A9+		
Printing Method	3" direct thermal	
Printing Speed	220 mm/sec max	
Dot Density (DPI)	203.2	
Dot Pitch (mm)	0.125*0.125	
Effective Printing Width	74mm, 588dots	
Printing Direction	Unidirectional with friction feed	
Character/Line	Font A / Font B	[14*28] 42 columns / [10*20] 56 columns
Paper	Type / Width Thickness / Roll diameter	Thermal paper / 79.5mm (±0.5mm) 0.07mm / 83 Ømm
Reliability	TPH Life / MCBF	100km / 60,000,000 lines
Character/Set	Alphanumeric character Extended graphic	95 128 x 35 page
Barcode	EAN-8, EAN-13, CODE39, CODE93, CODE128, ITF, UPC-A, UPC-E, CODABAR	
Emulation	ESC/POS command compatible	
Driver	Windows / OPOS	
Interface	Serial / Parallel / USB / Ethernet / USB+Serial combo / Wi-fi / Bluetooth	
Power	DC 24V, 2.5A	
Data Buffer	4 Kbyte	
Cutting	Life / Cutting method	1,000,000 cuts / Partial Cut
Temperature	Operation / Storage	0 ~ 40°C / -20 ~ 60°C
Qualification	CE, FCC, KCC	
Dimension(WxHxD)	145 x 215 x 130(mm)	



\* 사양은 사전 통보없이 변경될 수 있습니다.

The one that creates a new trend

# A10+ Receipt Printer



고성능의 빠르고 안정된 고급디자인의 미니프린터 A10+

- 심플하며 고급스러운 디자인
- 매장 인테리어와 맞게 색상 선택 가능
- 사용자 편의를 위한 외장형 멜로디, 음성지원
- 상단금지 방식, Auto cutter 내장으로 편리한 사용
- 부드럽고 빠른 인쇄속도
- 다양한 인터페이스 지원

## System



		A10+
Printing Method	3" direct thermal	
Printing Speed	220 mm/sec max	
Dot Density (DPI)	203.2	
Dot Pitch (mm)	0.125*0.125	
Effective Printing Width	74mm, 588dots	
Printing Direction	Unidirectional with friction feed	
Character/Line	Font A / Font B	[14*28] 42 columns / [10*20] 56 columns
Paper	Type / Width	Thermal paper / 79.5mm (±0.5mm)
	Thickness / Roll diameter	0.07mm / 83 Ømm
Reliability	TPH Life / MCBF	100km / 60,000,000 lines
Character/Set	Alphanumeric character / Extended graphic	95 / 128 x 35 page
Barcode	EAN-8, EAN-13, CODE39, CODE93, CODE128, ITF, UPC-A, UPC-E, CODABAR	
Emulation	ESC / POS command compatible	
Driver	Windows / OPOS	
Interface	Serial / Parallel / USB / Ethernet / USB+Serial combo / Wi-fi / Bluetooth	
Power	DC 24V, 2.5A	
Data Buffer	4 Kbyte	
Cutting	Life / Cutting method	1,000,000 cuts / Partial Cut
	Temperature	Operation / Storage
Qualification	CE, FCC, KCC	
Dimension(WxHxD)	142 x 201 x 126(mm)	

\* 사양은 사전 통보없이 변경될 수 있습니다.



## PLU keyboard



- 키별 메뉴, 상품, 업무 기능 등록 가능
  - 카드리더기 일체형 제품
- 인터페이스 방식 : PS/2, USB
- programmable 키수 : 98개

## Scanner



## Cash drawer



The one that creates a new trend



# 'POPs' Restaurant solution

'POPs' 솔루션은 레스토랑, 일반식당, 카페, 패스트푸드 등 외식업종의 주문관리, 매장관리, 재고관리 등 다양한 통합관리를 제공합니다. 매출 및 동향을 실시간으로 파악할 수 있으며, 메뉴관리 및 가격관리 등 체계화된 관리가 가능한 외식솔루션입니다.



Login

- 판매, 결제, 매장, 재고관리 등 외식업종 통합관리
- 간편한 인증 Process 도입
- 통합 서비스 형태 지원 (선불/후불/배달)
- 사원별, 업무 단위별 체계적인 보안지원
- 사용자 이미지 및 디자인 변경
- 특정시점의 백업데이터 복원
- 매장 실시간 상태, 속보, 경영정보 지원
- 단가관리, 재고관리, 쿠폰관리 등 체계적인 관리 지원
- 사원 근태/급여 기능, 비주얼 기능 강화



메인화면



POS 테이블화면



POS 주문화면



복합결제



판매방식 설정



관리화면



테이블관리



주문화면 설정



매출집계

The one that creates a new trend



# 'Utong' Retail solution

'Utong' 솔루션은 도소매점, 대형 할인마트, 문구 등 유통업종의 매장관리, 입출고관리, 재고관리등 다양한 통합관리를 제공합니다. 심플한 인터페이스와 쉬운 사용법, 강화된 기능으로 유통 비즈니스의 맞춤형 솔루션입니다.



Login


- 다양한 스킨 지원 (31가지 기본 스킨 제공)
- 사용자 정의 리포트 검색 (분류, 품목, 시간, 월, 일간 매출 조회)
- 프로모션 기능 지원
- 외국환 결제 및 다양한 복합 결제 가능
- 사용자별 메뉴 구성
- 사원별 언어 선택 가능
- 사용자 정의 영수증 출력
- 체계적인 보안지원
- 다매장 지원 (통합 재고 관리, 수발주 기능)




POS 판매화면




POS 결제

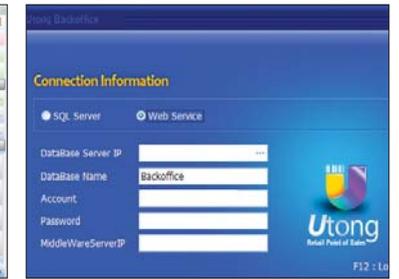

Backoffice - Login

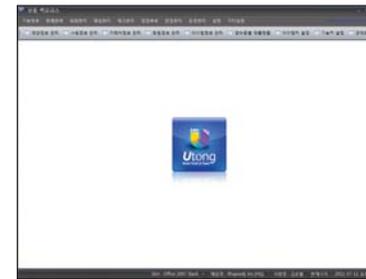


Backoffice - Main

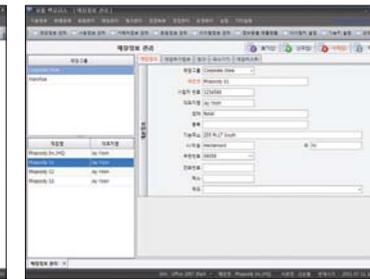


Backoffice - 매장등록



Backoffice - 판매화면 키설정

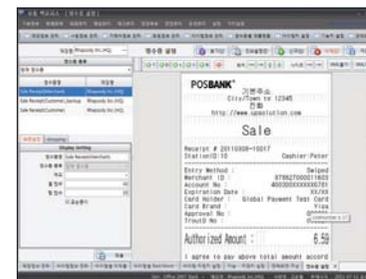

Backoffice - 영수증 설정

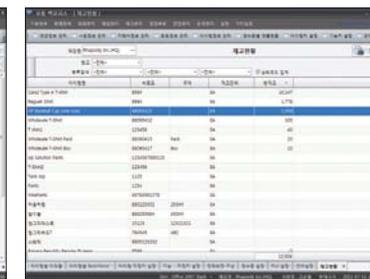

Backoffice - 재고현황



Backoffice - Report



 [www.posbank.co.kr](http://www.posbank.co.kr)

**POSBANK<sup>®</sup>**

서울 금천구 가산동 429-1 뉴티캐슬 805~808호  
대표전화. 1588-6335 서비스센터. 1588-6312